



BERKELEY AIR
MONITORING GROUP

**Monitoring and Evaluation of the Jiko Poa
Cookstove in Kenya**

Berkeley Air Monitoring Group

January 2012

Authors and Acknowledgements

Report Authors

Simone Brant
David Pennise
Dana Charron
Erin Milner
Jacob Kithinji

Field Team

Betty Kajuju
James Mbatia
Justus Muoki
Hesbon Nyangena
Justin Nyaga

Carol deWilde and Sam Lee of Berkeley Air assisted with data processing and analysis and April Gavin provided administrative support. Johanna Matocha and Martin Mwangi of the Paradigm Project and Supatu provided invaluable assistance in identifying participants and providing introductions to the communities. Thanks are due also to Elisa Derby at Winrock International for her support and guidance, as well as Sandra Callier, Orlando Hernandez, Julia Rosenbaum, Jose Molina, and Renuka Bery for their inputs on the framing of the project and their logistical and funding support. Finally, the authors acknowledge the support of Merri Weinger and John Borrazzo of USAID for their direction of the WASHplus program, which provided the funding for this work, and Pradeep Pursnani at the Shell Foundation for the loan of key instrumentation and other in-kind support that made the project possible.

Table of Contents

1	EXECUTIVE SUMMARY	5
2	INTRODUCTION	7
2.1	STUDY BACKGROUND AND OBJECTIVES	7
2.2	STUDY LOCATION AND TIMING.....	7
2.3	TRADITIONAL AND INTERVENTION STOVES	8
3	METHODS	10
3.1	STUDY DESIGN.....	10
3.2	HOUSEHOLD SELECTION	11
3.3	STOVE USE.....	11
3.4	FUEL EFFICIENCY ASSESSMENT	12
3.5	HOUSEHOLD AIR POLLUTION MONITORING METHODS	13
3.6	AMBIENT AIR QUALITY	14
3.7	SOCIOECONOMIC SURVEY	15
4	RESULTS	16
4.1	HOUSEHOLD DEMOGRAPHIC CHARACTERISTICS.....	16
4.2	STOVE USE AND ADOPTION	18
4.2.1	<i>Reported During Day of Monitoring</i>	18
4.2.2	<i>Results from Temperature-Based Stove Use Monitoring (SUMS)</i>	19
4.2.3	<i>Comparison of SUMS and Survey Data During Monitoring</i>	23
4.3	FUEL CONSUMPTION MEASUREMENTS.....	25
4.3.1	<i>Seasonal Fuel Consumption</i>	26
4.4	HOUSEHOLD AIR POLLUTION	27
4.4.1	<i>Indoor Air Pollution Concentrations</i>	27
4.4.2	<i>Factors Affecting IAP</i>	30
4.4.2.1	<i>Other IAP Sources</i>	30
4.4.2.2	<i>Ventilation Rates</i>	30
4.4.2.3	<i>Ambient Air Pollution</i>	31
4.5	USER PERCEPTIONS AND SOCIOECONOMIC ASSESSMENT.....	31
4.5.1	<i>User Perceptions of Stove Characteristics</i>	31
4.5.2	<i>Jiko Poa Cooking Tasks</i>	33
4.5.3	<i>Socioeconomic Benefits of Jiko Poa</i>	34
4.5.3.1	<i>Time Savings</i>	34
4.5.3.2	<i>Monetary Savings</i>	36

5	DISCUSSION	37
5.1	HOUSEHOLD AIR POLLUTION RESULTS COMPARED TO STANDARDS	37
5.2	COMPARISON WITH PREVIOUS JIKO POA FUEL MEASUREMENTS IN KENYA.....	38
5.3	STUDY LIMITATIONS	38
5.4	FURTHER RESEARCH NEEDS	39
6	REFERENCES.....	40

1 Executive Summary

The Jiko Poa is a locally manufactured rocket-type biomass cookstove being distributed in Kenya by the Paradigm Project¹. The aim of this study was to provide an analysis of the performance of the Jiko Poa cookstove in Kenyan homes by assessing its effects on household air pollution, fuel efficiency, and socioeconomic indicators. The study was conducted according to a ‘before after’ design: initial baseline measurements were made in the homes, after which the Jiko Poa was introduced and a second round of measurements was carried out about two weeks later. The use of all the cooking devices in the home was measured continuously, starting after baseline monitoring and continuing in a subset of homes for 10 weeks after the introduction of the new stove.

Study components include:

- Temperature-based continuous stove use monitoring systems (SUMS) in 26 households;
- 24-hour measurements of fuel use and kitchen carbon monoxide (CO) and fine particulate (PM_{2.5}) concentrations in 50 households; and
- Socioeconomic survey in 50 households.

Key results of the study include:

- Average daily stove use during the baseline monitoring was 5.3 uses in 24 hours and after Jiko Poa introduction was 6.8 uses. Average daily cooking time during the baseline period was 403 minutes and after the intervention was 373 minutes.
- Average SUMS and reported cooking time during the after monitoring period for all stoves were similar. SUMS data resulted in 331 minutes spent using the Jiko Poa and survey data yielded 336 minutes spent using the Jiko Poa.
- During the first five weeks of Jiko Poa adoption, usage gradually decreased each week from an average of 1.3 uses per day during the first week to 0.4 uses per day during the fifth week. During the same time, traditional stove use also slightly decreased from 1.6 to 1.0 uses per day. Overall wood stove usage dropped over time as the rainy season advanced, but no SUMS data is available on the usage of charcoal or LPG stoves.
- Average wood use during the 24-hour monitoring period decreased significantly by 51% from 10.0 ± 1.5 kg/day before introduction of the Jiko Poa to 4.9 ± 0.9 kg/day after its

¹ The Paradigm Project (<http://www.theparadigmproject.org/home>) is a social enterprise working to create sustainable social, economic, and environmental value within developing world communities. They plan to distribute 5 million stoves worldwide by 2020.

introduction. Use of charcoal (the only other significant secondary fuel) remained constant on the two days of monitoring.

- Between the before and after monitoring periods, we saw a 51% decrease in average 24-hour $PM_{2.5}$ concentrations (2537 ± 667 to $1250 \pm 318 \mu\text{g}/\text{m}^3$) and a 37% reduction in CO concentrations (38 ± 6 to 24 ± 5 ppm). Both were statistically significant ($p=0.000$). However, even after these reductions, pollution levels were 36 times the least stringent level that the World Health Organization (WHO) considers acceptable (Interim Target 1) for particulates and 2 to 5 times higher than the average recommended exposure limits for CO.
- Ambient or background $PM_{2.5}$ concentrations measured ranged from 3 to $92 \mu\text{g}/\text{m}^3$ with a mean concentration of $22 \mu\text{g}/\text{m}^3$ and median of $8 \mu\text{g}/\text{m}^3$.
- According to the survey, the four most important features of a good stove were that it used little fuel, cooked quickly, produced less smoke, and looked modern. These were the main reasons that households decided to purchase the Jiko Poa. Other important qualities were durability, portability, that the food tasted good, and that the kitchen and pots were cleaner. Nearly all participants felt that the Jiko Poa had all or most of the characteristics they valued.
- Of the 92% of households reporting time savings and 80% of households reporting monetary savings from reduced fuel purchases, most invested that time or money into their homes and farms. Extra time was most often spent working on the farm, tending animals, or doing other household chores. Average monetary savings were \$2.59 and generally used to purchase food, other household necessities, school supplies, or pay school fees. Those households with businesses outside of the home reported devoting the extra time and money to the business.

While the indoor air pollution reductions documented in this study are substantial and robust and comparable to those seen in similar African studies, they must be taken in context in order to inform on potential health benefits. Both the baseline and after concentration levels indicate that the study kitchens are very unhealthy human environments. Despite the consistent performance of the intervention stoves, pollution levels were 36 times the least stringent level that the WHO considers acceptable for particulates and two to five times higher than the average recommended exposure limits for CO. Future research should focus on assessing how much time various household members spend in these smoky environments in order to assess health impacts. Factors leading to more complete integration of the Jiko Poa into household cooking should also be investigated.

2 Introduction

2.1 Study Background and Objectives

Under Strategic Objective 4, the WASHplus Program has the mandate to direct USAID resources towards testing new and innovative approaches and tools for implementation of high-impact indoor air quality interventions. As a result, Berkeley Air Monitoring Group was funded under this directive to work with WASHplus partners FHI-360 and Winrock International to leverage and extend an existing stove field testing program in Kenya to include a promising locally manufactured advanced biomass stove that would not otherwise have been evaluated. The results are expected to assist the USAID mission in Kenya and its implementation partners as they work to scale-up improved biomass stoves and to inform the sector more broadly on the field performance of rocket stoves in Africa.

The aim of this study was to provide an assessment of the household air pollution, fuel use, behavior change, and socioeconomic impacts resulting from introduction of the Jiko Poa, a locally produced biomass rocket-type stove, in Kenyan households. The stove is currently being distributed by a social enterprise, the Paradigm Project¹, through direct sales and partnerships with NGOs. This study sought to measure impacts of the stove in households that were representative of typical direct purchasers of the stove (not those receiving the stove from NGOs). In order to achieve this, households in wood-using villages that were interested in purchasing the stove but had not yet received it were identified through a local dealer and were offered a discount in return for allowing monitoring to take place in their homes. A ‘before after’ study design was used where baseline measurements were made before introduction of the Jiko Poa. Then, households received the new stove and a second round of measurements was completed about two weeks later, once cooks had adjusted to using the new stove.

2.2 Study Location and Timing

The study took place in villages near the towns of Nyahururu and Embu in the Central Province of Kenya (Figure 1). Nyahururu households were located at an altitude of 2600 to 2800 m where weather was cool enough to require space heating. Embu households were at an altitude of 1200 to 1300 m where temperatures were warmer.

The intervention stove was the Jiko Poa, a locally made rocket stove (Figure 2f). The rocket stove, developed in the 1980s, is a stove with an L-shaped chamber where sticks are fed into the horizontal opening and the pot is placed on top of the vertical opening. This design is meant to improve combustion and heat transfer by insulating the chamber around the fire, generating a good draft to the fire, and lifting the sticks off of the ground (Bryden et. al. 2005).

Figure 2: Stove photos: (a) three-stone fire, (b) Jiko Kisasa, (c-e) other baseline stoves, and (f) Jiko Poa.





3 Methods

3.1 Study Design

This study was designed as a semi-controlled household experiment to monitor the household air pollution, fuel use, and socioeconomic effects of the Jiko Poa wood cookstove in Kenyan households.

The evaluation was planned to test the impact of the stoves in typical households under normal conditions and usage patterns. Sampling took place only on days when cooking was expected to be typical of an average day, to ensure that measurements would be comparable. During the after measurements were taken, cooks were asked to use the improved stove at least some of the time, though they were allowed to use other stoves for some tasks if that was what they normally did. These somewhat controlled conditions allowed the study to test the performance of the stoves under realistic conditions.

The study was conducted according to a 'before after' study design. First, baseline measurements were made in each home. Then, study households received stoves in retail packaging and were shown how to use the stove properly. An attempt was made to mimic the typical purchase experience as closely as possible, although the intervention stoves were delivered to the homes by the study team because it was not feasible to have the commercial distributor visit the village each day. The households were then given about two weeks to adjust to using the new stove before the survey team returned to collect the after measurements. No control group was

necessary since this was a short term assessment.

24-hour measurements of fuel use and kitchen carbon monoxide (CO) and fine particulate (PM_{2.5}) concentrations were taken in 50 households. A socioeconomic survey was conducted in all households at the end of the monitoring period. This covered time and monetary savings associated with the Jiko Poa as well as user impressions of the intervention stove. Demographic information was collected for all households as was information on all meals cooked, other sources of indoor air pollution during the monitoring period, cooking habits, and seasonal variation.

Logging temperature sensors were installed on all stoves in a subset of homes to track stove usage and adoption over a longer time period (10 weeks). The extent to which the introduced stove is used over the longer term will determine the extent to which indoor air pollution and fuel measurements made under somewhat controlled conditions can be applied to uncontrolled conditions.

3.2 Household Selection

Study participants were recruited with the assistance of a local dealer selling stoves for the Paradigm Project. The dealer had previously identified groups of women interested in purchasing the stove. Households were then offered a discounted price in return for participation in the study (\$10 compared with \$15 suggested retail price). All group members who met the study criteria -- that they have an indoor wood stove and used it for most cooking activities -- were invited to participate. Additional eligible households not on the original list were recruited until the target number of 25 households in each village was reached.

3.3 Stove Use

Table 1 below details stove use and adoption assessment methods including surveys and temperature-logging sensors used for this study. The Stove Use Monitoring System (SUMS) uses temperature-logging sensors affixed to the stove to collect data on frequency and duration of stove use. The sensors (iButton model DS1922T) were affixed to the back of each of the stoves (traditional wood, intervention, and any other stove present) and onto the kitchen wall in 26 homes. The SUMS recorded the stove temperature every seven minutes for five weeks in 26 households and ten weeks in 14 households.

Table 1: Stove use and adoption assessment methods.

Method of Data Collection	Method Details	Resulting Usage Information
Stove use survey administered at the end of each 24-hour monitoring period (before and after Jiko Poa introduction)	Cooks were asked which stoves they used and for how long. On the after survey, they were also asked to estimate their cooking time savings in general, if any.	Reported number of stove uses and cooking time by stove type during the monitoring days (before and after). Reported general estimate of cooking time savings.
Stove use monitoring sensors (SUMS)	SUMS placed on all stoves in households during the after monitoring, and stove temperatures recorded for five weeks in 26 households and ten weeks in 14 households.	Measured number of uses for the 24-hour after monitoring, and measured daily and weekly stove uses for an additional 5-10 weeks.
Follow-up survey	After 10 weeks, households were asked if they were still using the Jiko Poa and, if not, why.	Estimated stove adoption and reason for adoption patterns.
Stove use survey and SUMS comparison	Integrate survey results with SUMS data during the after monitoring period by comparing reported cooking activities to SUMS data.	Estimated discrepancy between cooks' reported stove use and measured stove use during 24-hour monitoring periods.

3.4 Fuel Efficiency Assessment

Fuel efficiency was measured using a one day version of the Kitchen Performance Test Version 3.0 (Bailis, Smith, and Edwards 2007). All fuels to be used were weighed at the beginning and end of the 24-hour monitoring period. Fuels were weighed with Salter Brecknell ElectroSamson digital scales (Figure 3). Scales with 40 kg maximum capacity and 0.05 kg accuracy were used in most cases. All scales were calibrated before and throughout the study to ensure accurate readings.

Moisture readings were taken at the beginning of each monitoring period with a Delmhorst BD-2100 moisture meter so that fuel weights could be corrected to account for wood moisture (Figure 3).

Figure 3: Fuel weighing and moisture readings.



3.5 Household Air Pollution Monitoring Methods

The air samplers and real-time monitors were placed in the kitchen. All equipment was collocated one meter from the stove and 1.5 meters above the floor (Figure 4). Equipment was placed in secure bags to reduce noise and to avoid disturbance to the monitors.

Figure 4: Collocated monitors in a home.



During sampling, minute-by-minute kitchen concentrations were recorded using real time data-logging monitors for PM_{2.5} (UCB-PATS, Berkeley Air Monitoring Group, Berkeley, CA USA) and CO (Pac 7000, Dräger, Lübeck, Germany) in all households.

Gravimetric PM_{2.5} samples were also collected for half of the households using aluminum cyclones equipped with 37 mm diameter Teflon filters at a flow rate of 1.5 liters/minute using constant flow pumps supplied by Casella. This achieved a median cut point of 2.5 µm.

During the first monitoring visit, kitchen, window, and door dimensions were measured, and the location of the monitoring equipment was recorded in order to ensure consistency in subsequent monitoring rounds.

Ventilation rates in all homes were estimated by calculating the rates that the kitchen CO concentrations decreased at the end of the cooking events according to the method described by McCracken and Smith (McCracken and Smith 1998). The ventilation rates are expressed in air exchanges per hour, the number of times per hour that the air in the room is completely replaced.

3.6 Ambient Air Quality

In order to assess background pollution levels, 24-hour gravimetric PM_{2.5} samples were collected for ambient air quality in the vicinity of participating households using an AirMetrics MiniVol PM_{2.5}, PM₁₀ Sampler (Eugene, OR USA). 47 mm 2-micron Teflon filters with built-in support rings were used for sampling with a flow rate of 5 L/min. The MiniVol was placed in a location where it would not be disturbed such as on the roof of a home or latrine (Figure 5). The MiniVol's location varied to cover several locations within each village in order to get a representative sample of ambient particulate levels in the two villages.

Figure 5: MiniVol placement.



3.7 Socioeconomic Survey

A questionnaire was administered to the main cook in the home after each 24-hour monitoring period (Figure 6). The questionnaires were written and answers recorded in English though the survey was administered in a local language (Swahili or Kikuyu). All members of the field team were fluent in English and Swahili while two also spoke Kikuyu. Questions were pretested during the initial fieldwork that was expanded to include the Jiko Poa. Responses were recorded electronically via an Android phone (Samsung Galaxy Fit) or tablet computer (Viewsonic Viewpad 7). Household members were asked about their cooking activities during the sampling period, including time spent cooking, foods cooked, fuel type used, number of people cooked for, household demographics, and other sources of indoor air pollution, such as lamps, cigarettes, and incense. Perceptions of time and monetary savings, as well as frequency of stove use and impressions of the improved stoves were also collected.

Figure 6: Surveyor administering questionnaire.



4 Results

4.1 Household Demographic Characteristics

Table 2 describes the demographic characteristics of study households. Households tended to be quite poor with nearly half reporting income of less than one dollar per day, and only 36% of households having electricity. Few participants had education beyond secondary school, and many had only a primary school education.

Table 2: Household demographic characteristics.

Mean Household Size	4.1 ± 2.7 (range of 1-9)				
Monthly Income (USD)	0-30 48%	30-60 8%	60-90 0%	>90 2%	Did Not Respond 42%
Female Head of Household Education	None 14%	Primary School 44%	Secondary School 40%	Technical College 2%	
Male Head of Household Education	None 5%	Primary School 45%	Secondary School 31%	Trade School 19%	
Household's Main Income Source	Farming 72%	Commerce 2%	Salaried Position 16%	Temp. Employment 6%	Assistance from Children 4%

Electricity	Yes 36%	No 64%
Cell Phone Ownership	Yes 94%	No 6%
TV Ownership	Yes 62%	No 38%
Radio Ownership	Yes 88%	No 12%
Bicycle Ownership	Yes 50%	No 50%
Motorcycle Ownership	Yes 10%	No 90%
Refrigerator Ownership	Yes 2%	No 98%
Toilet Type	Private 94%	Public 6%

Nearly all households had kitchens that were separate structures from the main house or had a chimney in the main house. Kitchens tended to be made of wood and corrugated metal with soil floors. 90% of households had a three-stone fire as the traditional stove with the stones either arranged in an equilateral triangle or a U-shape. 43 of the 50 households also owned a charcoal stove, while 10 owned an LPG stove (Table 3).

Table 3: Kitchen characteristics of participating households.

Kitchen Location	Separate Room in Main House 16%	Separate Structure 84%				
Cooking Location	Always Indoor 84%	Mostly Indoor 14%	Equally Indoor/Outdoor 2%			
Kitchen Wall Material	Concrete 10%	Wood 66%	Corrugated Metal 6%	Brick 4%	Clay 2%	Soil 12%
Kitchen Roof Material	Wood 2%	Corrugated Metal 96%	Soil 2%			
Kitchen Floor Material	Concrete 12%	Clay 2%	Soil 84%	Dung and Ash 2%		

Open Eaves	Yes 80%	No 20%	
Mean Kitchen Volume	17.8 ± 5.8 m ³ (range of 5.2 – 50.0)		
Baseline Wood Stove	Open Fire 90%	Jiko Kisasa 4%	Other 6%
Chimney	Yes 16%	No 84%	
Charcoal Stove Ownership	Yes 86%	No 14%	
LPG Stove Ownership	Yes 20%	No 80%	

4.2 Stove Use and Adoption

4.2.1 Reported During Day of Monitoring

At the end of each 24-hour monitoring period, cooks were asked to recount which stoves they had used, for how long, and for how many people the food had been prepared. This information was used to calculate average daily stove use and cooking time. The data in Table 4 (below) reveals that the study households generally cooked between five and seven times per day, while Table 5 shows that their stoves are lit for six to seven hours each day.

Cooks reported that the baseline stoves (three-stone fire, Jiko Kisasa, and other wood) were almost completely replaced by the Jiko Poa during the second round of monitoring (Tables 4 & 5). Although there was a significant increase in reported stove uses between monitoring periods (5.3 to 6.8 uses per day), average cooking time did not change significantly. It is unclear whether this indicates a change in the total amount cooked or if instead there were simply more short uses of the Jiko Poa, since it cannot be left unattended for as long as a traditional stove.

While 10 of the households owned an LPG stove, few used it on a regular basis. LPG was generally used for making tea, heating water, or reheating food. No household reported use of an LPG stove during monitoring; therefore use of those stoves is not reported.

Table 4: Reported average number of stove uses per day by stove type.

	N	Baseline	After	% Difference	t-test ²
All Stoves	50	5.3 ± 0.7	6.8 ± 0.7	28	0.00
3 Stone Fire	50	4.1 ± 0.7	0.2 ± 0.2	-95	0.00
Jiko Kisasa	50	0.66 ± 0.63	0.04 ± 0.09	-91	0.05
Other wood	50	0.44 ± 0.49	0	-100	0.08
Charcoal	50	0.12 ± 0.16	0.14 ± 0.17	17%	0.85
Jiko Poa	50	NA ^a	6.4 ± 0.1	NA ^b	NA

^a Not applicable, as the Jiko Poa was not introduced until the after phase.

^b Not available, as there is no Before measurement; nonetheless there was nearly complete adoption of the Jiko Poa on the day of monitoring.

Table 5: Reported average cooking time per day (minutes) by stove type.

	N	Baseline	After	% Difference	t-test
All Stoves	50	403 ± 57	373 ± 58	-7	0.38
Traditional stoves	50	133 ± 222	15 ± 54	-118	0.00
Charcoal	50	4 ± 5	3 ± 4	-38	0.64
Jiko Poa	50	NA ^a	340 ± 25	NA ^b	NA

^a Not applicable, as the Jiko Poa was not introduced until the after phase.

^b Not available, as there is no Before measurement; nonetheless there was nearly complete adoption of the Jiko Poa on the day of monitoring.

4.2.2 Results from Temperature-Based Stove Use Monitoring (SUMS)

26 households had valid SUMS data for the first five weeks of Jiko Poa adoption. Over this time we see usage generally decreasing each week from an average of 1.3 uses per day during the first

² A t-test is used to determine whether two groups are statistically different from one another. When a t-test has a p value of less than 0.05, the difference is considered to be significant (we are 95% confident that the values are truly different).

week to 0.4 uses per day during the fifth week (Figure 7). Of those households, 14 had valid SUMS files for the next five weeks as well (Figure 8). Here, usage seems to have stabilized at an average of 0.5 to 0.7 uses per day for each of these weeks.

Figure 7: Average Jiko Poa uses per day for each of the first five weeks of adoption for 26 households. The dashed line indicates the average value for that week.


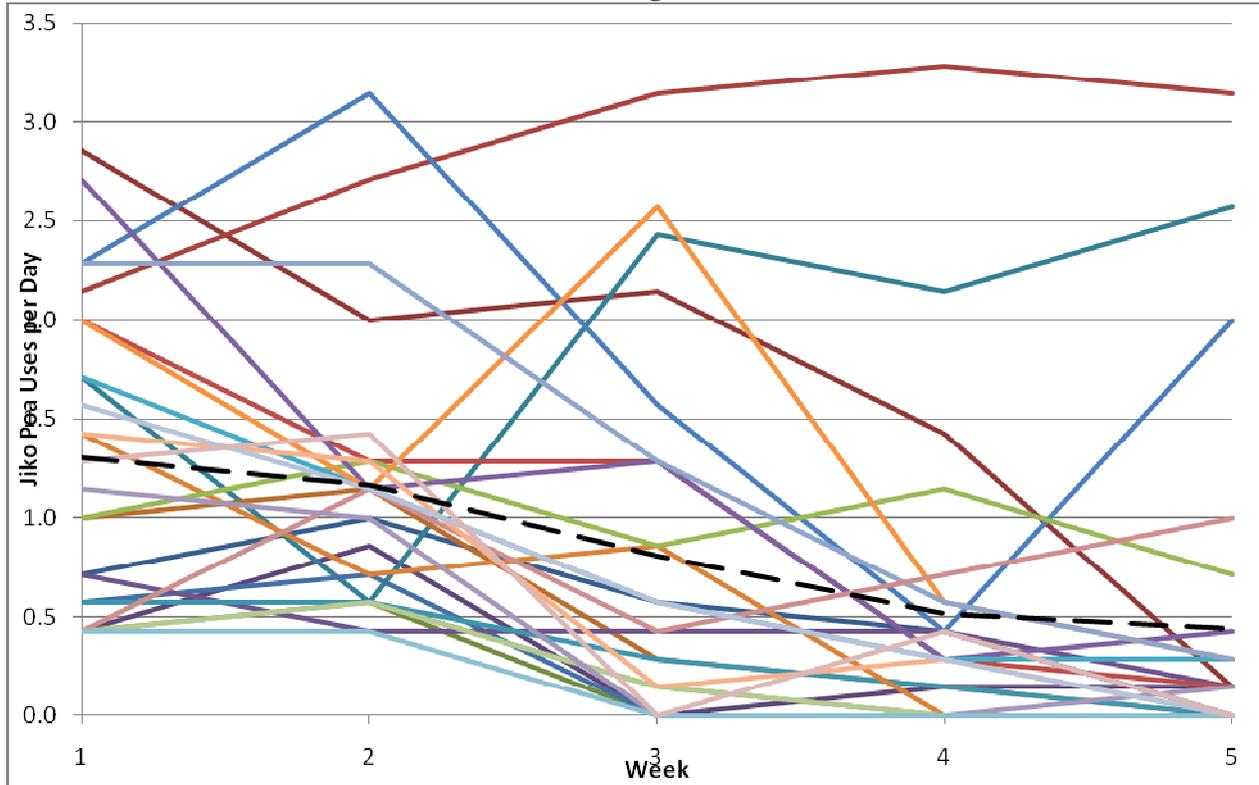


Figure 8: Average Jiko Poa uses per day for each of the first ten weeks of adoption for 14 households. The dashed line indicates the average value for that week.

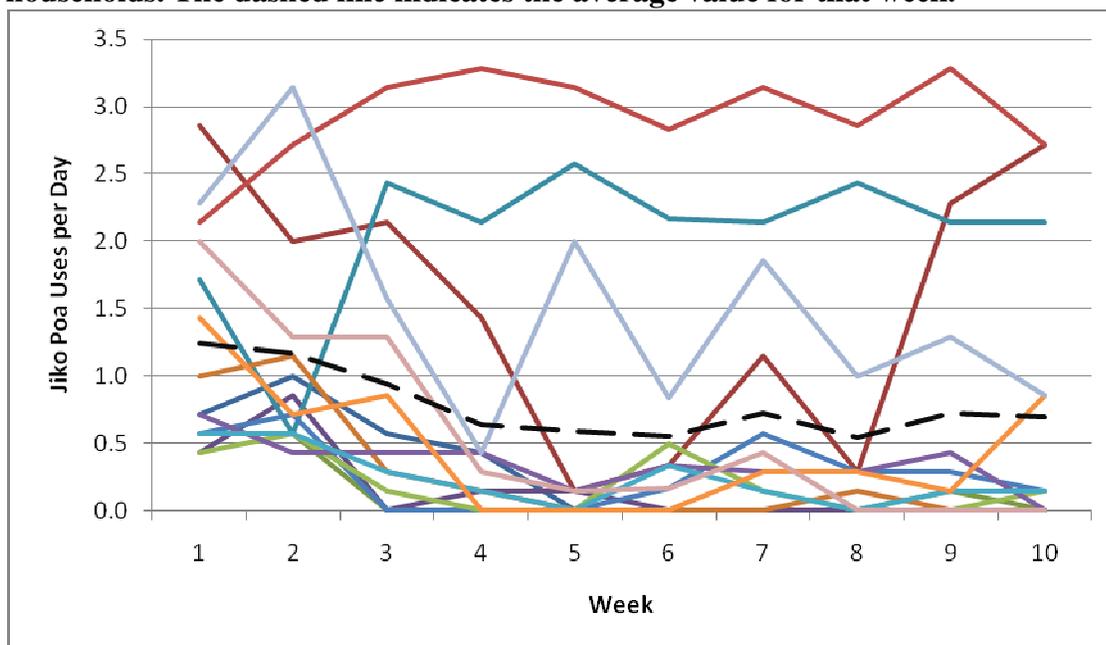

After introduction of the Jiko Poa, use declined from about half of wood stove uses during the first two weeks to about one third of uses during the last two weeks (Table 6).

Table 6: Average number of uses per day for the Jiko Poa and traditional wood stove by week.

	Week 1	Week 2	Week 3	Week 4	Week 5
Total	2.9 ± 2.9	2.7 ± 2.4	2.0 ± 1.9	1.6 ± 1.5	1.4 ± 1.4
Jiko Poa	1.3 ± 1.7	1.2 ± 1.6	0.8 ± 1.9	0.5 ± 1.7	0.4 ± 1.8
Traditional	1.6 ± 2.2	1.5 ± 2.1	1.2 ± 2.2	1.1 ± 2.1	1.0 ± 2.1

Figure 9 depicts the average uses per day of both the Jiko Poa and traditional stove across all households for five weeks. Some households also had a charcoal and/or LPG stove available, but those data are not included here since SUMS files proved unreliable for charcoal stoves and LPG was a very small fraction of total stove use. We see overall wood stove usage dropping over time as the rainy season advances. Additionally, the traditional stove comprises a larger percentage of total cooking over time.

Figure 9: Average uses per day of the Jiko Poa and traditional stove for all households.


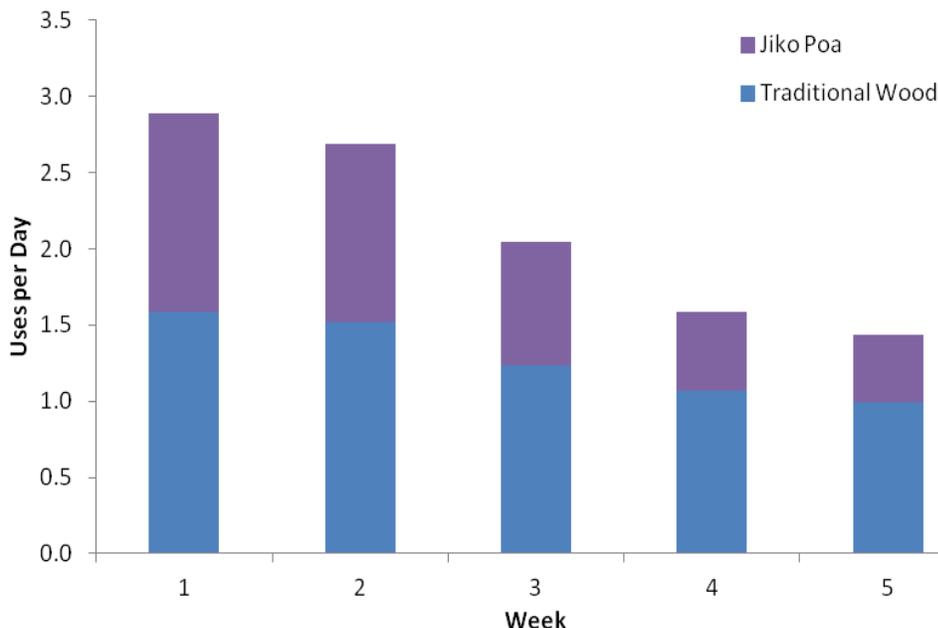



Figure 10 illustrates stove stacking patterns in two example households, one which integrated the Jiko Poa into the kitchen and one that did not.

Figure 10: Average uses per day of each stove owned by a household over six weeks for (a) a household that adopted the Jiko Poa and (b) one that did not.

a

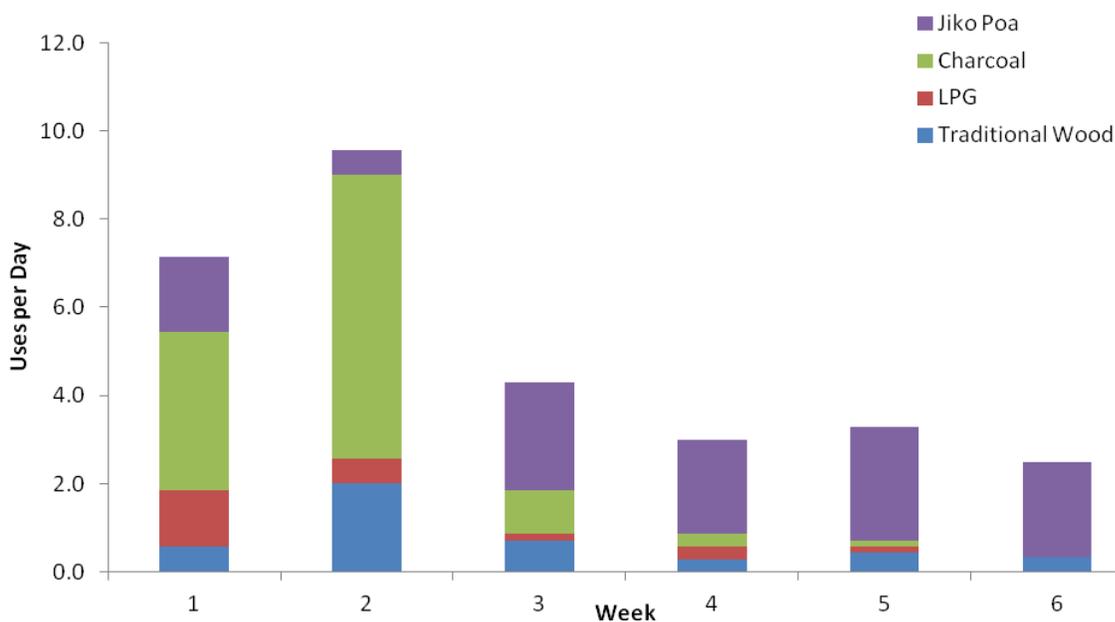

b

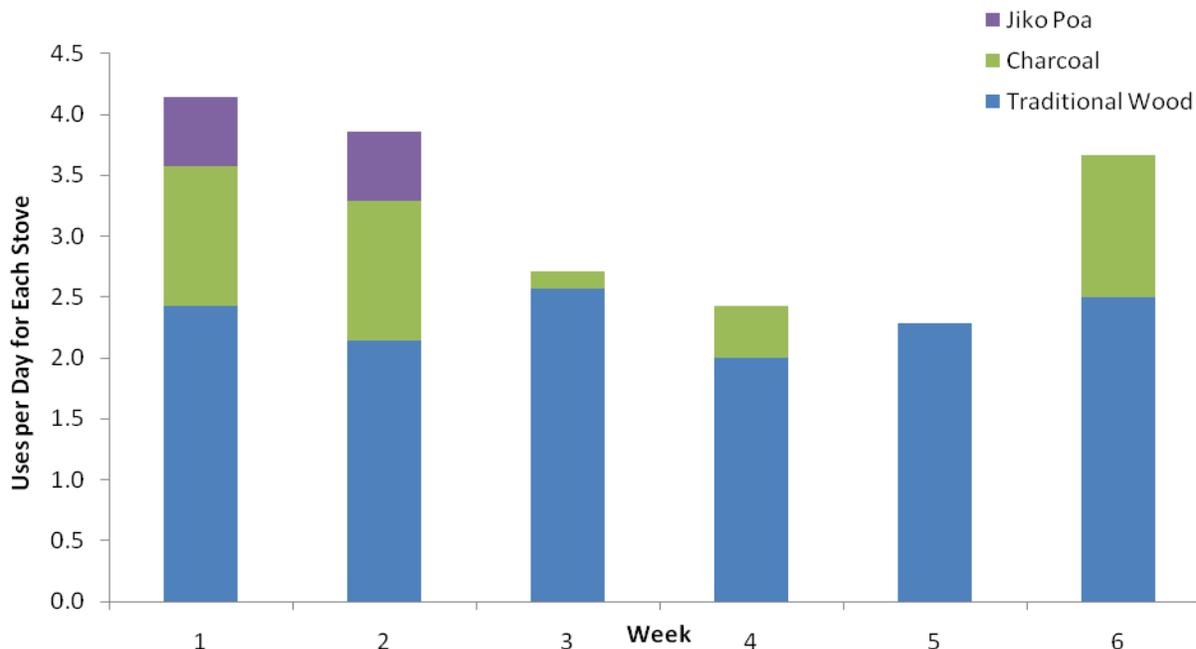

After noticing the trend of decreased Jiko Poa usage after ten weeks, we asked the 25 households in Embu whether they were still using the stoves and if not, why. Of those households, 13 reported that they continued to use the stove every day, while five others said that they used the stove occasionally. Seven households had stopped using the stove completely. Of the cooks who had stopped using the stove or who only used it occasionally, the primary reasons given was that they could not leave it unattended for slow cooking items such as githeri or that they were not available to give the constant attention the stove requires. Some also did not use it because they found that it cooked slowly or because they had other fuels such as charcoal available.

4.2.3 Comparison of SUMS and Survey Data During Monitoring

One of the benefits of the SUMS is that it gives an unbiased account of how much a stove is used. SUMS can therefore be employed to examine the discrepancy between the amount that cooks report using their stoves and their actual stove use. In order to investigate the differences between survey responses and SUMS, we compared the cooking activities reported during the after monitoring periods with the SUMS data from these periods.

These data indicate that cooks in this study were very accurate in reporting stove use. The

average discrepancy between reported stove use and SUMS estimates was within 10 minutes on average for total stove use as well as for use of the Jiko Poa and baseline wood stove (Table 7).

Table 7: Average SUMS and reported cooking time (minutes) during the after monitoring period for all wood stoves, the Jiko Poa, and the baseline stove.

	SUMS	Reported	Difference	t-test
All Stoves	375±44	371±62	4	0.90
Jiko Poa	331±40	336±56	-5	0.83
Baseline	29±28	21±30	8	0.50

These data indicate that cooks in these villages do not appear to have a strong bias in estimating their total amount of cooking or use of the Jiko Poa, with reported cooking times and SUMS estimates distributed fairly evenly around a one-to-one correlation (Figure 11). However, only two of 20 households with valid SUMS files reported using the traditional stove during the monitoring period, while five actually used it for some amount of time (Figure 12).

Figure 11: Actual vs. reported total stove use during the 24-hour after monitoring period for each household. The dashed line indicates one-to-one correlation.


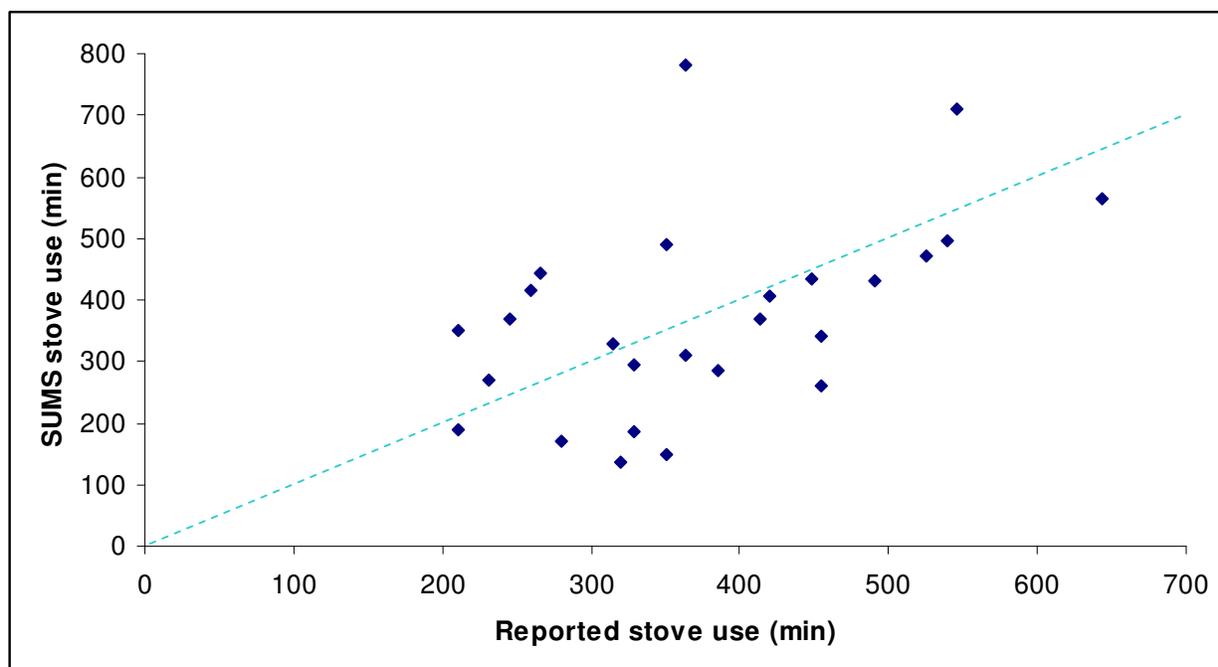


Figure 12: Actual vs. reported cooking time for the Jiko Poa, traditional stove, and charcoal stove during the 24-hour after monitoring period for each household. The dashed line indicates one-to-one correlation.

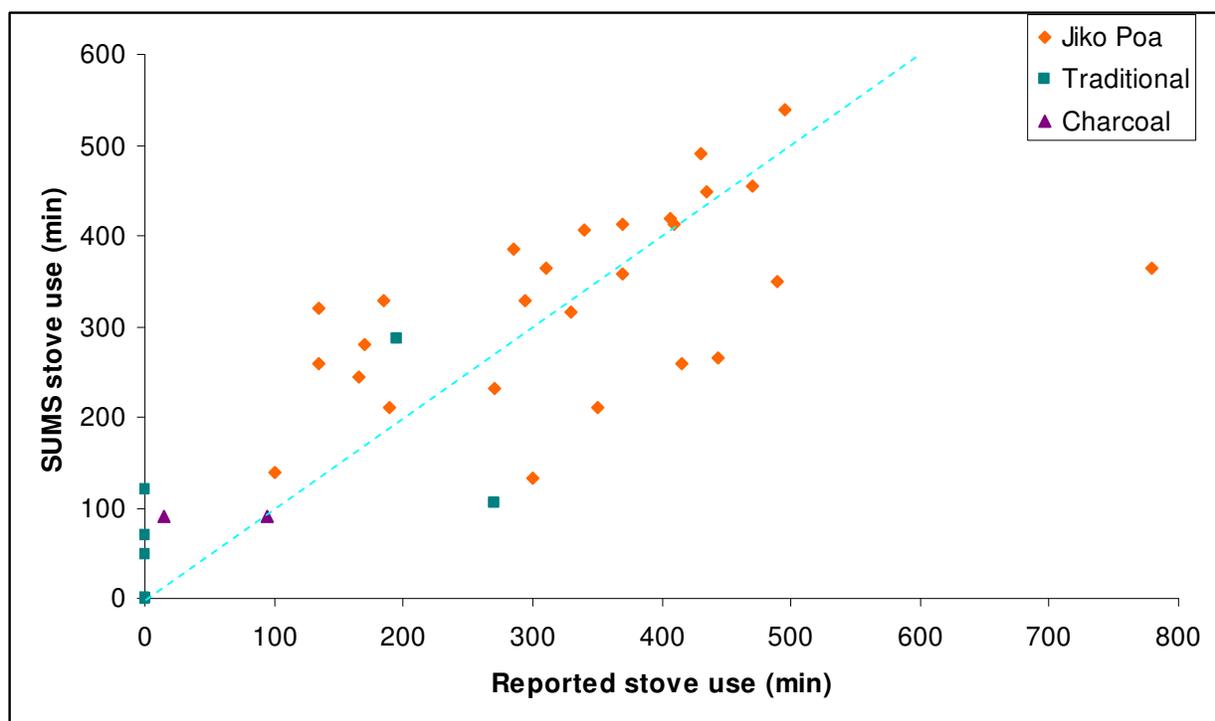

4.3 Fuel Consumption Measurements

Wood and charcoal were the only fuels used in the kitchens during the monitoring periods. The change in fuel use was calculated two ways – total wood used during the monitoring period and wood used per standard person living in the household. The standard person concept accounts for differences in the amount eaten by men, women, and children. A male age 15 to 65 counts as one standard person, while women and men over 65 count as 0.8 standard person. Children under age 15 count as 0.5 standard person (FAO 1983).

Wood savings calculations were similar under both calculations (48 to 51% for all households) and highly significant. Charcoal use was small and did not change significantly (Table 8 and 9). All wood weights are presented as dry weights, meaning that the weight of water content in the wood is not included. As with indoor air pollution measurements, wood use and percent reductions were higher in Nyahururu than in Embu.

Table 8: Average daily fuel use per household for each fuel type by monitoring round and location.

Fuel Type	N	Baseline (kg)	After (kg)	% Change	t-test
All Wood	49	10.0 ± 1.5	4.9 ± 0.9	-51	0.000
All Charcoal	49	0.12 ± 0.12	0.05 ± 0.06	-54	0.28
Nyahururu Wood	24	11.6 ± 2.6	5.5 ± 1.7	-53	0.000
Nyahururu Charcoal	24	0.13 ± 0.16	0.06 ± 0.09	-51	0.35
Embu Wood	25	8.4 ± 1.3	4.3 ± 0.8	-49	0.000
Embu Charcoal	25	0.12 ± 0.18	0.05 ± 0.09	-60	0.51

Table 9: Average daily fuel use per standard person for each fuel type by monitoring round and location.

Fuel Type	N	Baseline (kg)	After (kg)	% Change	t-test
All Wood	49	3.7 ± 0.6	1.9 ± 0.4	-48	0.000
All Charcoal	49	0.05 ± 0.05	0.03 ± 0.03	-43	0.37
Nyahururu Wood	24	4.0 ± 0.9	2.0 ± 0.6	-50	0.000
Nyahururu Charcoal	24	0.05 ± 0.07	0.03 ± 0.05	-42	0.32
Embu Wood	25	3.4 ± 0.9	1.9 ± 0.7	-44	0.001
Embu Charcoal	25	0.04 ± 0.06	0.02 ± 0.04	-48	0.65

4.3.1 Seasonal Fuel Consumption

This study took place during the short rainy season in Kenya (October to November). The longer rains fall from March through May.

In order to gain an understanding of the representativeness of fieldwork conducted during the wet season of cooking practices during the rest of the year, participants were asked a series of questions about seasonal differences in fuels used and how they are acquired.

During the dry season, all 50 households used wood as their primary fuel. 20 households used charcoal as a secondary fuel and one used LPG, but only seven of these households reported using their secondary fuel more than one quarter of the time. 68% of households reported collecting all of their fuel during the dry season, while 26% bought all of their fuelwood and 6% bought most of their fuelwood.

In the wet season, when dry fuelwood is less available, seven of the 50 households reported switching to charcoal as their primary fuel. Additionally, 26 other households continue to use wood as their primary fuel, but use charcoal as a secondary fuel during the wet season. Use of LPG also increases somewhat with five households using it as a secondary fuel during the wet season. The proportion of households collecting their fuel remains similar during the wet season, with 61% reporting collecting all of their wood.

4.4 Household Air Pollution

4.4.1 Indoor Air Pollution Concentrations

Gravimetric measurements were used to adjust $PM_{2.5}$ concentrations measured with the UCB-PATS. The equation used for adjustment was calculated by running a regression of the gravimetric values on the UCB values for all households where both monitors were used. This resulted in the equation $Grav = 1.087(UCB) + 0.106$. The R^2 value for this regression was 0.85.

Table 10 and Figure 13 present the particulate results. Overall, there was a 51% reduction in $PM_{2.5}$ kitchen concentrations. This corresponded to a 53% reduction in Nyahururu and 48% reduction in Embu. However, in Nyahururu where altitude was higher and temperatures lower, absolute levels were greater, particularly during baseline measurements.

Table 10: Average 24-hour PM_{2.5} concentration by monitoring period for all households and by village (µg/m³).

	N	Baseline	After	% Difference	t-test
All	50	2537 ± 667	1250 ± 318	-51	0.000
Nyahururu	25	2946 ± 707	1395 ± 555	-53	0.000
Embu	25	2129 ± 549	1105 ± 292	-48	0.000

Figure 13: Average 24-hour PM_{2.5} concentration (µg/m³) for each monitoring period by village.³

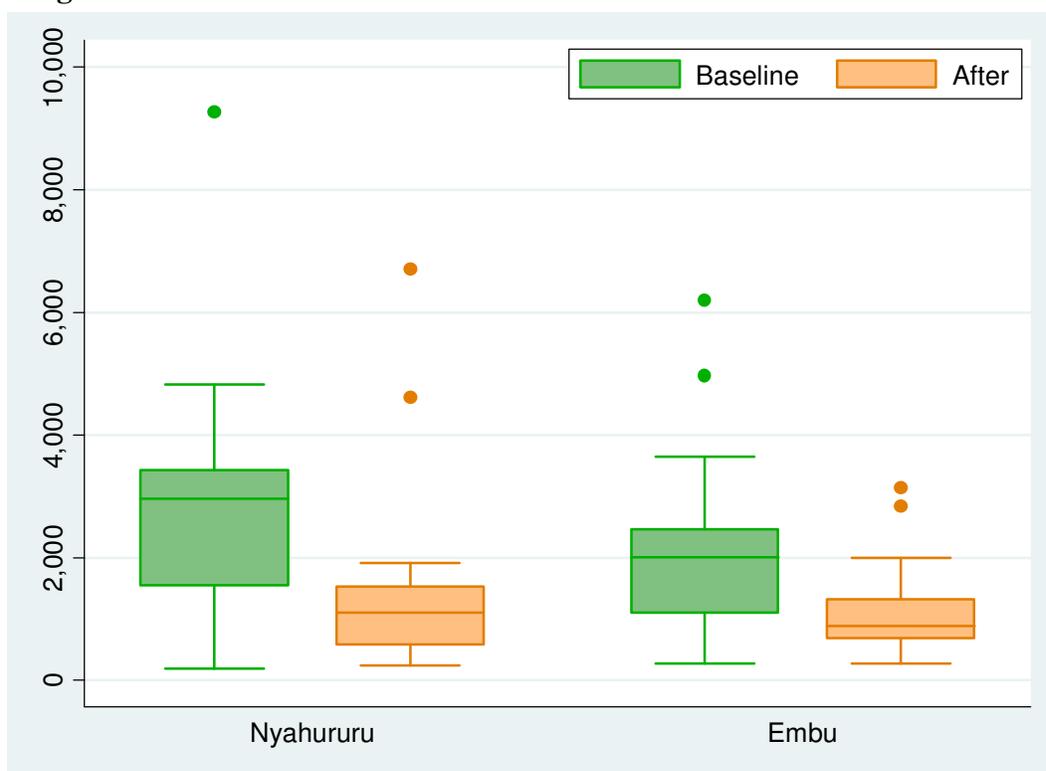



Table 11 and Figure 14 present the carbon monoxide (CO) results. Overall, there was a 37% reduction in CO kitchen concentrations. This corresponded to a 45% reduction in Nyahururu and 29% reduction in Embu. Unlike PM_{2.5}, CO baseline kitchen concentrations were similar in the two locations.

³ In a box plot, the median value is represented by the line across the box. The box covers the range between the 25th and 75th percentiles. The whiskers (lines extending from the box) reach to the next value adjacent to the box. Values outside of the whiskers are represented as circles.

Table 11: Average 24-hour CO concentration (ppm) by monitoring period for all households and by village.

	N	Baseline	After	% Difference	t-test
All	50	38 ± 6	24 ± 5	-37	0.000
Nyahururu	25	38 ± 8	21 ± 6	-45	0.000
Embu	25	37 ± 10	27 ± 8	-29	0.007

Figure 14: Average 24-hour CO concentration (ppm) for each monitoring period.

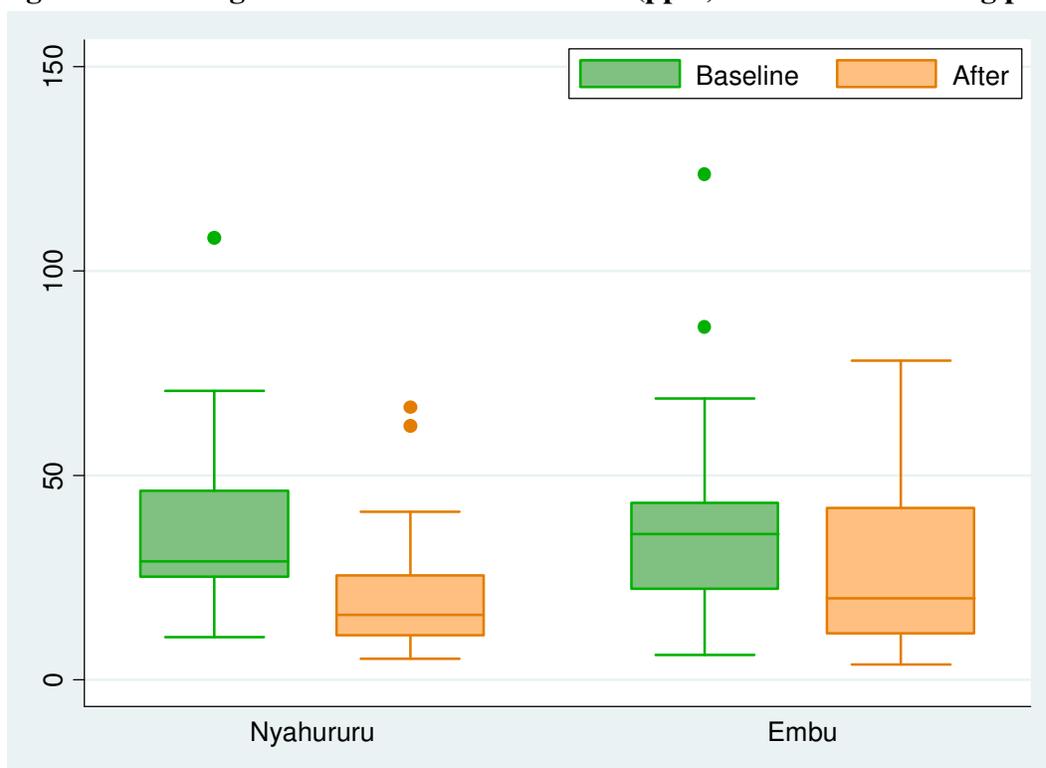

For CO, average concentrations were calculated for the maximum 15-minute, one-hour, and eight-hour intervals during the 24-hour monitoring period, matching the time periods used by the World Health Organization (WHO) in its Air Quality Guidelines. Since CO values were similar across villages, interval values were not broken down by location. Significant reductions of 21%, 32%, and 43% were seen for the 15 minute, 1-hour, and 8-hour maximums respectively (Table 12).

Table 12: Maximum CO levels for 15-Minute, 1-Hour and 8-Hour Intervals (ppm).

	N	Baseline	After	% Difference	t-test
15 minute	50	243 ± 51	191 ± 34	-21	0.046
1 hour	50	175 ± 36	120 ± 22	-32	0.002
8 hour	50	72 ± 13	41 ± 8	-43	0.000

4.4.2 Factors Affecting IAP

4.4.2.1 Other IAP Sources

Aside from stove use, the important sources of air pollution in participating households were kerosene lamps and cigarettes. However, average use of both was small and did not change significantly between monitoring periods (Table 13).

Table 13: Reported use of other sources of air pollution in the kitchen.

	N	Baseline	After	% Difference	t-test
Kerosene Lamp (minutes)	50	89 ± 24	78 ± 22	-12	0.54
Cigarette (number smoked)	50	0.08 ± 0.07	0.10 ± 0.16	25	0.83

4.4.2.2 Ventilation Rates

Ventilation rates in these homes are shown in Table 14 below. Overall, average air exchange rates decreased from 8.0 exchanges per hour in the baseline to 6.8 exchanges per hour during the after monitoring phase. Rates were somewhat higher in Embu than in Nyahururu where weather is cooler. The reduction in the average ventilation rate could be related to changes in weather and/or routine variation in kitchen ventilation practices such as opening doors and windows. It is also possible that people are less likely to open doors and windows when they are using the Jiko Poa than they would be when using a stove with higher emissions. While both average ventilation rates were relatively low, if the ventilation in the after period was as high as in the

baseline period, the average indoor air pollution concentrations in the after period would have been somewhat lower and the percent reductions therefore somewhat greater.

Table 14: Average air exchange rates (exchanges per hour).

	N	Baseline	After	% Difference	t-test
All	50	8.0 ± 1.2	6.8 ± 0.8	-16	0.04
Nyahururu	25	7.5 ± 1.3	6.4 ± 0.9	-14	0.13
Embu	25	8.6 ± 2.1	7.1 ± 1.4	-17	0.14

4.4.2.3 Ambient Air Pollution

In total, six ambient PM_{2.5} samples were obtained. Concentrations measured ranged from 3 to 92 µg/m³ with a mean concentration of 22 µg/m³ and median of 8 µg/m³.

4.5 User Perceptions and Socioeconomic Assessment

4.5.1 User Perceptions of Stove Characteristics

According to the survey, the four most important features of a good stove were that it used little fuel, cooked quickly, produced less smoke, and looked modern. These were the main reasons that households decided to purchase the Jiko Poa (Table 15). Other important qualities were durability, portability, that the food tasted good, and that the kitchen and pots stayed cleaner. Nearly all participants felt that the Jiko Poa had all or most of the characteristics they valued.

Table 15: Main reasons households purchased the Jiko Poa.

Fuel Savings	86%
Cooks Fast	18%
Less Smoke	16%
Modern	8%

In half of the households, the wife was the family member who made the decision to purchase the Jiko Poa. In most others it was the husband (20%) or husband and wife together (22%). Nearly all of the cooks reported that the Jiko Poa made them more modern (98%), more admired by their families (100%), and increased their standing in the community (96%). Most bought the stove because it promised fuel savings. Secondary reasons for purchase were reduced smoke and faster cooking. Cooks reported that the stove was well accepted by their families with only five households reporting that a family member did not approve of their using the stove.

When asked to describe the type of person who would buy the Jiko Poa, the most common responses were someone modern and upwardly mobile. A Jiko Poa customer was also described as someone concerned about saving wood, either because they were an environmentalist or because they had a fuel shortage.

Cooks were also asked why their mother or a neighbor might or might not use the improved stove. These reasons were in line with what attracted participants to the stove. The most common reasons given for using the stove were that it saves fuel, produces less smoke, and is portable. Reasons they might not adopt the stove were the need for constant tending, dry wood, and small pieces of wood (Table 16).

Table 16: Reasons a mother or neighbor might or might not adopt the Jiko Poa (multiple answers were accepted).

Reasons might adopt			Reasons might not adopt		
	Mother	Neighbor		Mother	Neighbor
Saves Fuel	86%	96%	Requires Constant Tending	66%	64%
Less Smoke	74%	72%	Cannot Use Wet Wood	48%	54%
Portable	70%	70%	Need Small Wood Pieces	46%	50%
Cooks Fast	56%	62%	Cannot Use Big Pots	44%	46%
Looks Modern	40%	58%	Cost	40%	44%

4.5.2 Jiko Poa Cooking Tasks

Households reported adopting the Jiko Poa for a variety of tasks (Table 17). In nearly all cases, the Jiko Poa was used for tasks for which the household's baseline wood stove, whether open fire, Jiko Kisasa, or another wood stove, had previously been used. Only one household reported replacing a task for which they had previously used LPG and three replaced a charcoal stove for certain tasks.

Additionally, households generally found that the Jiko Poa was well suited to cooking their staple foods (Table 18). The one food that the majority of homes did not find to be at least as easy to cook on the Jiko Poa is githeri, a combination of corn kernels and beans that is cooked at low heat for several hours. The mixture is then fried, perhaps with other vegetables, before being eaten. While githeri is being cooked, it is often left unattended over burning embers or smoldering logs for an extended period of time. As the Jiko Poa is not well suited to being left unattended, many households continued to cook githeri on an open fire.

Table 17: Tasks for which Jiko Poa is used.

Uses of the Jiko Poa	Percent of Households
General Cooking	86
Specific Foods	12
Heating Water	64
Tea	58

Table 18: Ease of cooking staple foods on the Jiko Poa compared to the traditional stove.

Food	Easier	Harder	Same	Not Sure
Ugali ⁴	60%	24%	6%	10%
Githeri	44%	30%	6%	20%
Kienyenji ⁵	60%	16%	9%	18%
Stew	88%	2%	6%	4%
Rice	88%	2%	6%	4%
Porridge	72%	6%	4%	18%
Water	90%	6%	4%	0%

4.5.3 Socioeconomic Benefits of Jiko Poa

4.5.3.1 Time Savings

Socioeconomic benefits of improved stoves are primarily derived from time and fuel savings. Cooks were asked to give feedback on the overall impacts of the Jiko Poa. All cooks reported fuel savings and most reported reductions in time spent procuring fuel and in cooking time, defined as the time the stove was lit (Table 19).

⁴ Ugali is a dish made of maize meal cooked with water to a dough-like consistency. It is the most common staple starch in much of Eastern and Southern Africa.

⁵ Kienyenji, also known as mukimo, is a Kenyan dish made of corn, beans, and/or greens mixed into mashed potato.

Table 19: Reported changes in fuel use, cooking time, and time procuring fuel after purchase of the Jiko Poa.

	More	Less	Same	Not Sure
Fuel Use	0%	100%	0%	0%
Time Stove Lit	26%	68%	4%	2%
Time Procuring Fuel	0%	92%	0%	8%

Of those who reported a reduction in cooking time, most savings were in the range of 30 minutes to several hours per day. Those who reported longer cooking time were fairly evenly spread from a few minutes to over two hours (Table 20). Using the midpoints of the time periods and three hours for those reported a change of greater than two hours, results in an average 65 minute reduction in cooking time across all households.

Table 20: Reported difference in cooking time per day.

	0-15 minutes	15-30 minutes	30-60 minutes	1-2 hours	>2 hours
If Longer	23%	23%	23%	23%	8%
If Shorter	3%	9%	15%	35%	38%

The general impressions of household members on the effect of the Jiko Poa were compared to actual reported cooking time during the two rounds of monitoring. While the amount of time the stove is used in any particular home varies greatly from day to day, it appears that on average the reported cooking time during monitoring (Table 5) is generally in line with overall impressions of faster cooking times (Table 20) with only a 35 minute difference between these values.

Of the 92% of households reporting time savings, most spend their extra time doing farm work on tasks such as tending animals or crops, or doing household chores. Some time was also spent resting and working outside the home.

Table 21: Reported use of time saved.

Farming/Tending animals/garden	80%
Household chores	39%
Rest	11%
Working outside the home	5%

4.5.3.2 Monetary Savings

40 households reported that they were saving money due to fuel savings. The amount saved per week ranged from \$0.50 to \$10 with an average of \$2.59 (Table 22).

Table 22: Reported money saved from fuel savings per week.

N	Savings Range	Average Savings
40	\$0.50 - \$10	\$2.59

The 80% of households reporting monetary saving from reduced fuel purchases primarily invested their money in their homes. Monetary savings were generally used to purchase food or other household necessities or to buy school supplies or pay school fees. Those with businesses outside of the home reported devoting the extra time and money to the business. Many households devoted time and monetary savings to multiple activities (Tables 21, 23).

Table 23: Reported use of money saved.

Buy food or other household necessities	65%
Pay school fees/Buy school supplies	23%
Hire farm laborers/house help	15%
Invest in business	5%
Savings	5%
Buy farm inputs	5%

5 Discussion

5.1 Household Air Pollution Results Compared to Standards

Results of this study showed a 37% reduction in CO kitchen concentrations and a 51% reduction in PM_{2.5} kitchen concentrations, with all reductions statistically significant at the 99% confidence level. While these reductions are substantial and robust, they must be taken in context in order to inform on potential health benefits. Both the baseline and after concentration levels indicate that the study kitchens are very unhealthy human environments. Despite the consistent performance of the intervention stoves, pollution levels were 36 times the least stringent level that the WHO considers acceptable (Interim Target 1) for particulates and two to five times higher than the average recommended exposure limits for CO (Table 24).

Table 24: Comparison of after IAP levels with WHO guidelines.

	After Kitchen Concentration	WHO Guideline
PM _{2.5} – annual ($\mu\text{g}/\text{m}^3$)	1250 \pm 318	35 (Interim Target 1)
CO – 24-hour (ppm)	24 \pm 5	6
CO – 8-hour max (ppm)	41 \pm 8	10
CO – 1-hour max (ppm)	120 \pm 22	25
CO – 15-min max (ppm)	191 \pm 34	90

The pollution reductions observed in this study are similar to those from a study in Ghana of a similar stove, the Gyapa. There, after introduction of the intervention stove, PM_{2.5} concentrations

decreased by 52% and CO concentrations decreased by 40% (Pennise et. al. 2009). However, the baseline kitchen concentrations measured in this study were three to four times the levels observed in Ghana (Table 25).

Table 25: Comparison of average baseline IAP levels from this study and a similar study in Ghana.

	Kenya	Ghana
PM _{2.5} (µg/m ³)	2537	650
CO (ppm)	38	12

5.2 Comparison with Previous Jiko Poa Fuel Measurements in Kenya

While this study carried out one-day fuel measurements, Berkeley Air had previously conducted three-day KPTs for the Paradigm Project in 2010 in three other Kenyan locations: Meru, Marsabit, and Nairobi. Current study values were converted to kg wood/person for comparison to the 2010 KPT figures. Observed fuel use was two to three times higher at the Embu and Nyahururu sites perhaps explaining the somewhat higher percentage fuel savings observed there (Table 26).

Table 26: Comparison of fuel savings from this study with 2010 results (kg wood/person).

	N	Before	After	% Change
Current Study	49	2.84 ± 1.82	1.48 ± 1.27	-47
2010 KPT	98	1.35 ± 1.16	0.83 ± 1.16	-39

5.3 Study Limitations

Ventilation rates decreased by an average of 16% between monitoring periods. If this change was weather-related, as opposed to a behavioral change related to adoption of the Jiko Poa, then air pollution reductions related to the stove are likely underestimated.

Since SUMS were installed at the end of baseline monitoring, they provide insight on adoption of the Jiko Poa stove and its integration into the kitchen, but no information on baseline stove use. Additionally, current SUMS data analysis methods are not fully automated, requiring some

manual data processing. With improvement of the data processing algorithms, additional information on cooking activity could be gleaned from the data.

5.4 Further Research Needs

This study documented very high air pollution levels in Kenyan kitchens. At the same time, we observed that the stove was often left smoking when githeri was simmering or no cooking was taking place while nobody was in the kitchen. The next step to estimating health effects would be to measure personal exposure to PM and CO and document who spends time in the kitchen and when. An affordable personal PM monitor would greatly assist this effort.

Also of interest would be further investigation of barriers to stove adoption such as the need for constant tending that makes preparing githeri more difficult on the Jiko Poa and challenges in having a constant supply of dry wood that is cut into thin pieces.

Currently, the benefits of SUMS are limited due to needs for sensors with increased memory and temperature thresholds and algorithms that allow for more accurate, faster processing of the temperature record.

6 References

- Bailis R, KR Smith and R Edwards. 2007. *Kitchen Performance Test (KPT) Version 3.0*. http://www.pciaonline.org/files/KPT_Version_3.0_0.pdf.
- Bryden M, D Still, P Scott, G Hoffa, D Ogle, R Bailis and K Goyer. 2005. Design principles for wood burning cook stoves. EPA 402-K-05-004.
- FAO. 1983. Wood fuel surveys. UN Food and Agriculture Organization.
- McCracken J and KR Smith. 1998. Emissions and efficiency of improved woodburning cookstoves in highland Guatemala. *Environment International*. 24(7):739-47.
- Pennise D, S Brant, SM Agbeve, W Quaye, F Mengesha, W Tedele and T Wofchuck. 2009. Indoor air quality impacts of an improved wood stove in Ghana and an ethanol stove in Ethiopia. *Energy for Sustainable Development*. 13:71-6.